

Fun 'Round the Clock Quilt

 HENRY GLASS



Finished Size: **36" x 44" (0.91 m x 1.12 m)**

Fabric Collection Name and Fabric Designer: **Happy Campers by Sharon Kuplack**

Technique: **Pieced**

Designed by: **Denise Russell of Pieced Brain**

Skill Level: **Beginner**


Fun ‘Round the Clock Quilt

Fabric Requirements

* For best results, we recommend NOT prewashing fabrics. Laundering may alter the dimensions required to complete the project as designed.


DESIGN	COLOR	ITEM ID	YARDAGE
(A) Frolicking Friends	Green	2727-66	⅓ yard (0.30 m)
(B) Tree Rings	Brown	2732-33*	½ yard (0.46 m)
(C) Constellations	Dark Blue	2736-77	⅓ yard (0.30 m)
(D) Happy Campers Panel	Dark Teal/Green	2738P-76	1 yard (0.91 m)

* includes binding

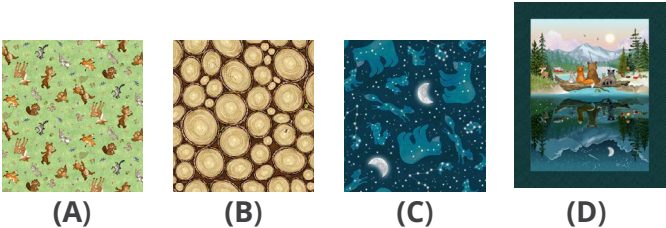

Backing (Purchased Separately)

44" (1.12 m) wide Camping Supplies OR 108" (2.74 m) wide Bubble Dot 108	Cream/Green Green	2731-36 2670-66	3 yards (2.74 m) 1⅓ yards (1.22 m)
---	----------------------------------	--------------------------------	---

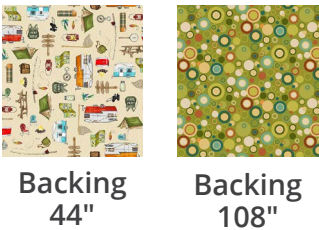

Additional Materials:

- Thread and sewing supplies
- Batting 44" x 52" (1.12 m x 1.32 m)

*All possible care has been taken to ensure the accuracy of this pattern. We are not responsible for printing errors or the manner in which individual work varies.
Please read the instructions carefully before starting this project. If kitting it is recommended a sample is made to confirm accuracy.
All free projects are intended to remain free and are not for resale.*

Fun 'Round the Clock Quilt

CUTTING

Notes:

- Please make sure to check henryglassfabrics.net for pattern updates prior to starting the project.
- All strips are cut across the width of fabric (WOF) from selvedge to selvedge edge unless otherwise noted.

From each, Fabrics A and C, cut:

(2) 3½" x WOF strips

Subcut one strip into, (2) 3½" x 19½" rectangles

Set aside the remaining **Fabric A** strip for the top border and the remaining **Fabric C** strip for the bottom border.

Fabric B, cut:

(5) 2½" x WOF strips for binding

Fabric D, fussy cut:

Trim panel to 30½" x 38½"

QUILT TOP ASSEMBLY

Notes: All seam allowances are ¼" (0.64cm). Sew pieces with right sides together. Press seam allowances open unless otherwise indicated. Follow the **Quilt Layout** diagram (page 4) while assembling the quilt top.

1. Sew the short edge of a 3½" x 19½" **Fabric A** rectangle to the short edge of a 3½" x 19½" **Fabric C** rectangle to make a side border strip, and press the seam open. Make 2.
2. Mark the center of the **Fabric D** panel on both sides. Align the seam of the side strips with the panel's center marks, then pin. Sew the strips to the panel, noting fabric placement (**Fabric A** toward the top). Trim the border edges if needed. Press.
3. Measure the width of the quilt top through the center. Trim the 3½" **Fabric A** strip to that length, and sew it to the top of the quilt. Trim the 3½" **Fabric C** strip to the same length as the top strip and sew it to the bottom of the quilt center. Press the seams away from the center.

All possible care has been taken to ensure the accuracy of this pattern. We are not responsible for printing errors or the manner in which individual work varies.

Please read the instructions carefully before starting this project. If kitting it is recommended a sample is made to confirm accuracy.


All free projects are intended to remain free and are not for resale.

Fun 'Round the Clock Quilt

FINISHING

4. Sew together the (5) 2½" **Fabric B** binding strips end to end using diagonal seams. Press the seams open. Press the binding strip in half, wrong sides together.
5. Layer the backing (wrong side up), batting, and quilt top (right side up). Baste the layers together and quilt as desired. Trim excess batting and backing even with the top of the quilt.
6. Leaving an 8" tail of binding and beginning along an edge of the quilt top, match the raw edges of the binding to the raw edges of the quilt. Sew the binding to the outside edge around all four sides and miter corners. Stop sewing approximately 12" from where you started and backstitch.
7. Lay both loose ends of the binding flat along the quilt edge. Where these two loose ends meet, fold them back onto themselves and press to form a crease. Using this crease as your stitching line, sew the two open ends of the binding together, with the right sides matching. Trim the seam to ¼" and press it open. Finish sewing the binding to the quilt.
8. Turn the binding over the raw edge to the back of the quilt and hand or machine stitch in place.

Quilt Layout

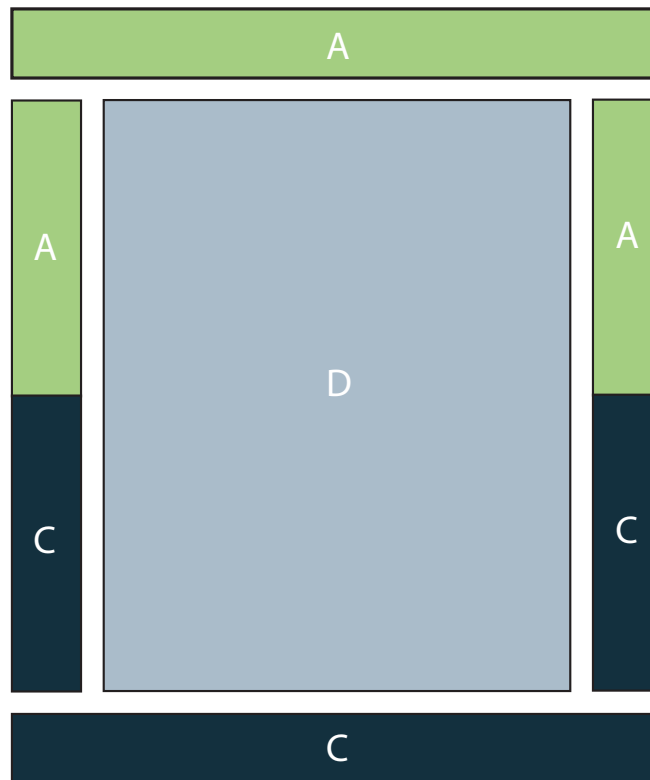

All possible care has been taken to ensure the accuracy of this pattern. We are not responsible for printing errors or the manner in which individual work varies.

Please read the instructions carefully before starting this project. If kitting it is recommended a sample is made to confirm accuracy.

All free projects are intended to remain free and are not for resale.