# Papa's Old Truck

A Free Project Sheet NOT FOR RESALE

By Leanne Anderson & Kaytlyn Kuebler





Quilt Design by Leanne Anderson & Kaytlyn Kuebler

### Quilt 2

Skill Level: Advanced Beginner





#### facebook.

Finished Quilt Size: 38" x 50" 49 West 37th Street, New York, NY 10018 tel: 212-686-5194 fax: 212-532-3525

Toll Free: 800-294-9495 www.henryglassfabrics.net

Please check our website for pattern updates before starting this project.

Finished Quilt Size: 38" x 50"

# PAPA'S OLD TRUCK Quilt 2

### Fabrics in the Collection



Truck Allover - Stone 9157-41



Truck Allover - Red 9157-88




Border Stripe - Teal 9158-61



Small Stripe - Stone 9159-91



Word and Tire - Teal 9160-61



Word and Tire - Stone 9160-91



Tonal Tools - Yellow 9161-33



Tonal Tools - Red 9161-88



Book Panel - Teal 9162P-77



Banner Activity Panel - Stone 9163P-41

### Select Fabrics from Starry Basics & Houndstooth Basics



**Starry Basics** Brown 8294-38



Houndstooth Basics Brown 8624-38



**Houndstooth Basics** New Teal 8624-78



**Houndstooth Basics** Black 8624-99

# PAPA'S OLD TRUCK Quilt 2

### Page 1

#### Materials

1 panel	Book Panel - Teal (A)	9162P-77
3/8 yard	Tonal Tools - Red (B)	9161-88
3/8 yard	Tonal Tools - Yellow (C)	9161-33
1 yard	Houndstooth Basics - Black (D)	8624-99*
⅓ yard	Word and Tire - Stone (E)	9160-91
⅓ yard	Small Stripe - Stone (F)	9159-91
1/4 yard	Houndstooth Basics - New Teal (G)	8624-78
5/8 yard	Truck Allover - Red (H)	9157-88
2 <sup>3</sup> / <sub>4</sub> yards	Truck Allover - Red (Backing)	9157-88

<sup>\*</sup>Includes binding

#### **Cutting Instructions**

Please note: All strips are cut across the width of fabric (WOF) from selvage to selvage edge unless otherwise noted.

#### From the Book Panel - Teal (A):

• Fussy cut (12) 7" squares, each centered on a panel.

#### From the Tonal Tools - Red (B), cut:

- (2) 2" x WOF strips. Sub-cut (12) 2" x 7" strips.
- (3) 2" x WOF strips. Sub-cut (12) 2" x 10" strips.

#### From the Tonal Tools - Yellow (C), cut:

- (2) 2" x WOF strips. Sub-cut (12) 2" x 7" strips.
- (3) 2" x WOF strips. Sub-cut (12) 2" x 10" strips.

#### From the Houndstooth Basics - Black (D), cut:

- (4) 1 1/8" x WOF strips. Sub-cut (78) 1 1/8" squares.
- (2) 1 ½" x WOF strips. Sub-cut (8) 1 ½" x 8 ½" strips.
- (2) 1 ½" x 38 ½" WOF strips.
- (2) 1 ½" x 28 ½" WOF strips.
- (5) 2 ½" x WOF strips for the binding.

#### From the Word and Tire - Stone (E), cut:

• (4) 1 \%" x WOF strips. Sub-cut (78) 1 \%" squares.

#### From the Small Stripe - Stone (F), cut:

- (2) 2" x 40 ½" WOF strips.
- (2) 2" x 31 ½" WOF strips.

#### From the Houndstooth Basics - New Teal (G), cut:

- (3) 1" x WOF strips. Sew the strips together end to end with diagonal seams and cut (2) 1" x 43 ½" strips.
- (2) 1" x 32 ½" WOF strips.

#### From the Truck Allover - Red (H), cut:

- (3) 3 ½" x WOF strips. Sew the strips together end to end with diagonal seams and cut (2) 3 ½" x 44 ½" strips.
- (2) 3 ½" x 38 ½" WOF strips.

#### From the Truck Allover - Red (Backing), cut:

• (2) 46" x WOF strips for the backing. Sew the strips together and trim to make the 46" x 58" back.

#### **Block Assembly**

Note: Pay attention to the unit orientations when assembling the various components.

1. Sew (1) 2" x 7" Fabric B strip to each side of (1) 7" Fabric A square. Sew (1) 2" x 10" Fabric B strip to the top and to the bottom of the Fabric A square. **Trim the** block to measure 8 1/2" square to make (1) Block One square (Fig. 1). Repeat to make (6) Block One squares total.





Fig. 1


2. Sew (1) 2" x 7" Fabric C strip to each side of (1) 7" Fabric A square. Sew (1) 2" x 10" Fabric C strip to the top and to the bottom of the Fabric A square. Trim the block to measure 8 ½" square to make (1) Block Two square (Fig. 2). Repeat to make (6) Block Two squares total.



Unit 1

Fig. 2

3. Place (1) 1 1/8" Fabric E square on top of (1) 1 1/8" Fabric D square, right sides together. Draw a line across the diagonal of the top square (Fig. 3). Sew 1/4" away from each side of the drawn diagonal line (Fig. 3). Cut the (2) squares apart on the drawn diagonal line (Fig. 4) to make (2) half-square triangles. Trim the half-square triangles to measure 1 ½" square to make (2) Unit 1 squares (Fig. 5). Repeat to make (156) Unit 1 squares total.

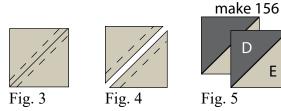

4. Sew (4) Unit 1 squares together into a 2 x 2 matrix to make (1) Unit 2 square (Fig. 6). The block should measure 2 ½" square. Repeat to make (39) Unit 2 squares total.



Е

# PAPA'S OLD TRUCK Quilt 2

## Page 2

5. Sew (13) Unit 2 squares together to make (1) Sashing Strip (Fig. 7 below). Repeat to make (3) Sashing Strips total. Ce

#### **Quilt Top Assembly**

(Follow the Quilt Layout while assembling the quilt top.)
6. Sew together (1) Block One square, (1) 1 ½" x 8 ½"
Fabric D strip, (1) Block Two square, (1) 1 ½" x 8 ½"
Fabric D strip and (1) Block One square, in that order from left to right, to make Row One. Repeat to make Row Three.


- 7. Sew together (1) Block Two square, (1) 1 ½" x 8 ½" Fabric D strip, (1) Block One square, (1) 1 ½" x 8 ½" Fabric D strip and (1) Block Two square, in that order from left to right, to make Row Two. Repeat to make Row Four.
- 8. Sew the (4) pieced rows, in numerical order, and (3) Sashing Strips together lengthwise and alternating them to make the Center Block.
- 9. Sew (1) 1 ½" x 38 ½" Fabric D strip to each side of the Center Block. Sew (1) 1 ½" x 28 ½" Fabric D strip to the top and to the bottom of the Center Block.

- 10. Sew (1) 2" x 40 ½" Fabric F strip to each side of the Center Block. Sew (1) 2" x 31 ½" Fabric F strip to the top and to the bottom of the Center Block.
- 11. Sew (1) 1" x 43 ½" Fabric G strip to each side of the Center Block. Sew (1) 1" x 32 ½" Fabric G strip to the top and to the bottom of the Center Block.
- 12. Sew (1) 3 ½" x 44 ½" Fabric H strip to each side of the Center Block. Sew (1) 3 ½" x 38 ½" Fabric H strip to the top and to the bottom of the Center Block to make the quilt top.
- 13. Layer and quilt as desired.
- 14. Sew the (5) 2 ½" x WOF Fabric D strips together, end to end with 45-degree seams, to make the binding. Fold this long strip in half lengthwise with wrong sides together and press.
- 15. Bind as desired.

Sashing Strip



Fig. 7

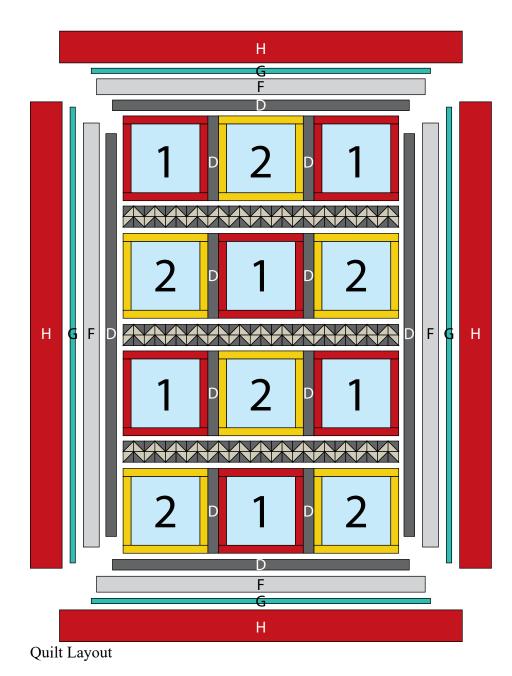

Every effort has been made to ensure that all projects are error free. All the information is presented in good faith, however no warranty can be given nor results guaranteed as we have no control over the execution of instructions. Therefore, we assume no responsibility for the use of this information or damages that may occur as a result. When errors are brought to our attention, we make every effort to correct and post a revision as soon as possible. Please make sure to check www.henryglassfabrics.net for pattern updates prior to starting the project. We also recommend that you test the project prior to cutting for kits. Finally, all free projects are intended to remain free to you and are not for resale.